



PO180 Copolymer Bagging Film

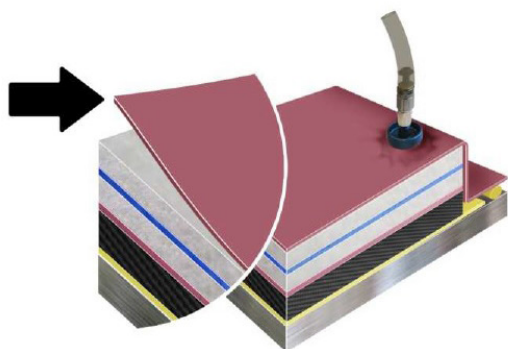

PO180 Copolymer Bagging Film



DESCRIPTION

PO180 is an advanced polyamide copolymer bagging film. **PO180** is a multilayer extruded polyamide film providing multiple layers of safety. **PO180** is strong, has a high elongation and is suitable for cure temperatures up to 180 °C (We recommend testing prior to use in autoclave). I.e. could be used for either vacuum moulding or vacuum infusion technologies with epoxy or polyester (avoid direct contact with phenolic resin).

STORAGE

Keep this film at room temperature and normal hygrometry. Do not expose this film to the day light: **PO180** is UV sensitive.

CHARACTERISTICS

Colour	Width	Length	Thickness	Weight	Auto release	Styrene resistant	Max. Serv. Temp.
Pink	2, 4, 6, 8, 10 & 12 m	60 up to 400 m	50 µ	54 g/m ²	YES	YES	180 °C
Pink	5 m	60 up to 400 m	75 µ	81 g/m ²	YES	YES	180 °C

Packaging	Pressure	Elongation at break		Tensile Strength	
Roll	7 bars (75µ)	MD	TD	MD	TD
		410%	420%	43 Mpa	40 Mpa