

## EC9 68 Z28 876s H8

### ECG 75 1/0 0.7Z 876s H8



## Product Specification

### Technical characteristics

| Control method   |        | Nominal value | Lot tolerances |       | Individual tolerances |       | CV % | Quality control procedure |
|------------------|--------|---------------|----------------|-------|-----------------------|-------|------|---------------------------|
|                  |        |               | Min            | Max   | Min                   | Max   |      |                           |
| Linear density   | tex    | 68            | 63,92          | 72,08 | 62,56                 | 73,44 | 2,5  | ISO 1889                  |
|                  | yds/lb | 7.295         | 7.761          | 6.882 | 7.929                 | 6.755 |      |                           |
| Loss on ignition | %      | 0,90          | 0,77           | 1,04  | 0,63                  | 1,17  | 10,0 | ISO 1887                  |
| Moisture content | %      | -             | -              | 0,5   | -                     | 1,50  | -    | ISO 3344                  |
| Breaking force   | N      | -             | 35             | -     | 30                    | -     | -    | ISO 3341                  |
|                  | lbf    | -             | 7,87           | -     | 6,74                  | -     |      |                           |
| Twist            | t/m    | 28            | 23,80          | 32,20 | 19,60                 | 36,40 | 10,0 | ISO 1890                  |
|                  | tpi    | 0,71          | 0,60           | 0,82  | 0,50                  | 0,92  |      |                           |

### Package information – Bobbin H8

|                     |     | Nominal length | Lot     |         | Individual value |         | Nominal weight |       | Percentage delivery |
|---------------------|-----|----------------|---------|---------|------------------|---------|----------------|-------|---------------------|
|                     |     |                | Min     | Max     | Min              | Max     |                |       |                     |
| Metered splice free | m   | 108.000        | 108.540 | 110.700 | 108.000          | 111.240 | kg             | 7,52  | 70                  |
|                     | yds | 118.110        | 118.701 | 121.063 | 118.110          | 121.654 | lbs            | 16,58 |                     |
| Non metered         |     | -              |         |         |                  |         | Min. kg        | 2,00  | 30                  |
|                     |     |                |         |         |                  |         | Min. lbs       | 4,41  |                     |

### Conditions of storage for the Vetrotex E-Glass products:


The material should be stored in its original packaging in dry conditions away from direct sunlight.

Storage temperatures of 10 to 35 °C and a relative humidity of 40 to 70% are recommended.

We recommend that the material be used within 24 months after the delivery date.

Before processing, the material should be conditioned, i.e. exposed unpacked at the ambient work shop temperature for at least 24 hours.

### Bobbin disc:

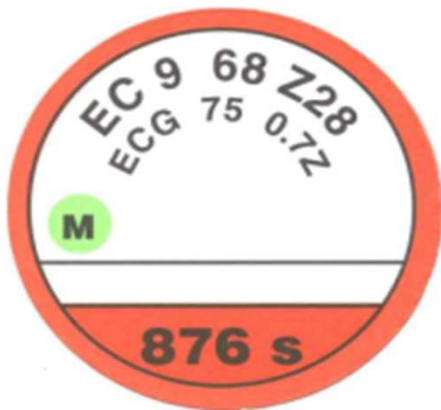

**Edition:**  
28.12.11

**Saint-Gobain Vetrotex**  
Viktoriaallee 3-5  
52066 Aachen - Germany  
[www.vetrotextextiles.com](http://www.vetrotextextiles.com)

#### Information:

##### Europa:

Phone: + 49 241 516 2041

E-mail: [vetrotex.europe@saint-gobain.com](mailto:vetrotex.europe@saint-gobain.com)

##### America/:

Phone: +1 704 895 5906

E-mail: [vetrotex.america@saint-gobain.com](mailto:vetrotex.america@saint-gobain.com)

##### Asia/Australia:

Phone: +33 6 77 26 49 06

E-mail: [vetrotex.asia@saint-gobain.com](mailto:vetrotex.asia@saint-gobain.com)